

Caldera

TotalColor qb

QB NEW FEATURES

Precise.

- Conformance to new ISO 13655-2017
«M1 method a» M0, M2, M3 measurement condition reflection and transmission
- New clamping system
- Measurement of fluorescent inks
- D50 illumination for backlit measurements
- New transmission holder M1

AUTOMATED SPECTROPHOTOMETER

A solution for high-end color management, TotalColor's automated table measures a vast range of media used in any printing technology.

Versatile

- Flexible, rigid, opaque, heavy, thick and transparent media
- Spot colors, linearization and profile creation
- Plain or structured surface

Automatic

- Fast multi-page measurements
- Auto-positioning feature

APPLICATION FIELDS

With EasyMedia

- Creation of high quality ICC profiles for best color reproduction
- For linearization of digital output devices

With PrintStandardVerifier option

- Verification of standards

TECHNICAL DATA


Maximum measuring area	290 x 200 mm
Target thickness	max 20 mm
Measuring apertures	reflection and transmission, 2/6/8 mm (switchable)
Interface	USB and Ethernet
Dimensions	571 x 433 x 160 mm (LxWxH)
Weight	11 kg net

Flexible.

- Removable measuring head for measuring spot colors
- Bigger measuring area
- Ethernet connection

Fast.

- Twice the speed of TotalColor Series 3
- Camera for instant automatic positioning

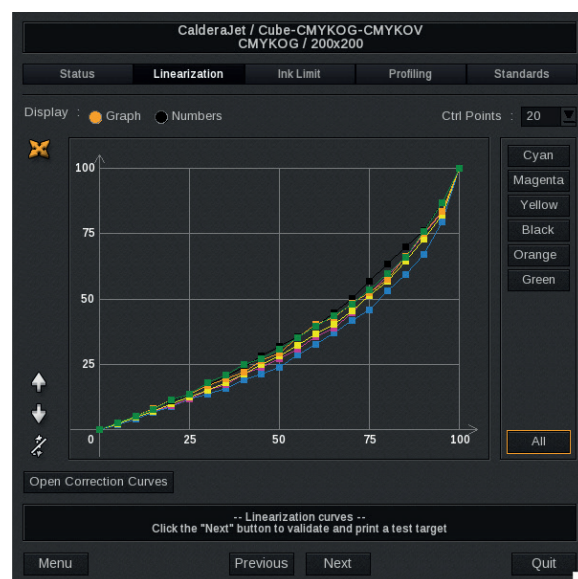

Linearization in EasyMedia

Caldera

TotalColor qb

WHAT IS QB-TECHNOLOGY?

Barbieri “qb-technology” is based on D50 LED illumination and contains the next generation of highest precision spectral core. It fully matches the new measurement condition M1 introduced with the ISO standard 13655-2009 that delivers full precision on color measurement.

This new technology opens a new area of applications for backlights in M1 and spot colors measurements.



1

Next Generation Spectral Core

The spectral core used in the Barbieri qb-technology guarantees accurate measurements with a spectral resolution of 2 nm and optical resolution of 10 nm.

2


D50 Illumination Based on 7 LED

Thanks to 7 LED by Just Normlicht, D50 illumination is reached. It fully matches the new measurement condition M1 introduced with the ISO standard 13655-2009 that guarantees the same illumination between the measurement device and the viewing booth.

3

3 Light Sources for homogeneous Illumination of Media Surface

A circular illumination is simulated with 3 light sources positioned around the measuring aperture (120° offset). The surface is homogeneously illuminated to benefit to media with difficult surface, UV inks and large measuring apertures (6mm and more).

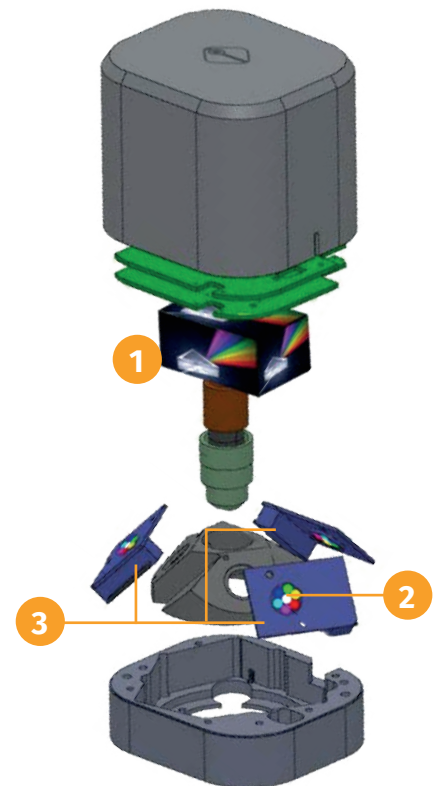

Copyright 2018 Caldera. All rights reserved. All trademarks, logo and brand names mentioned in this publication are property of their respective owners. All images and photographs here featured are the copyright of their respective owners.